


WOOD ESSENCE

FOREST

Nice Ker

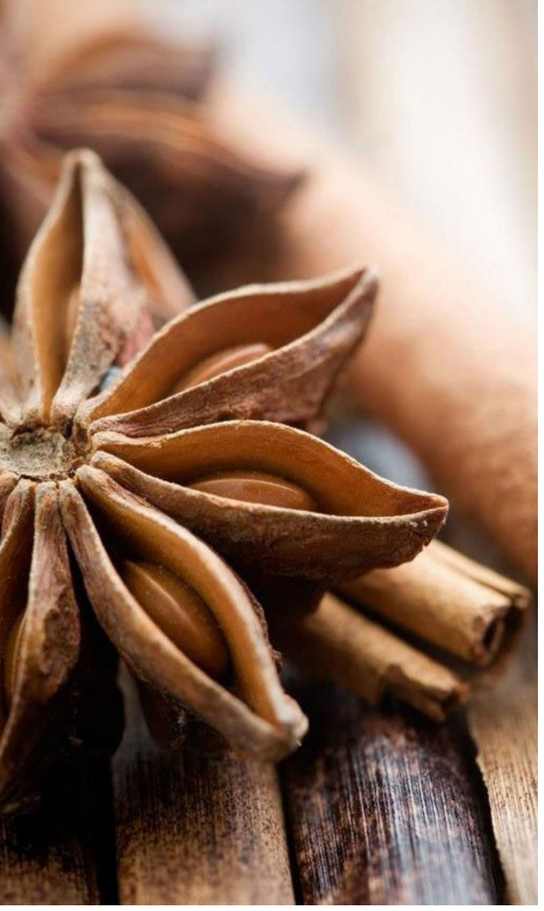

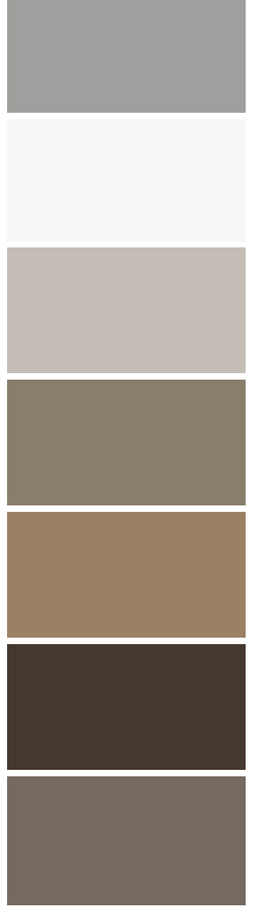

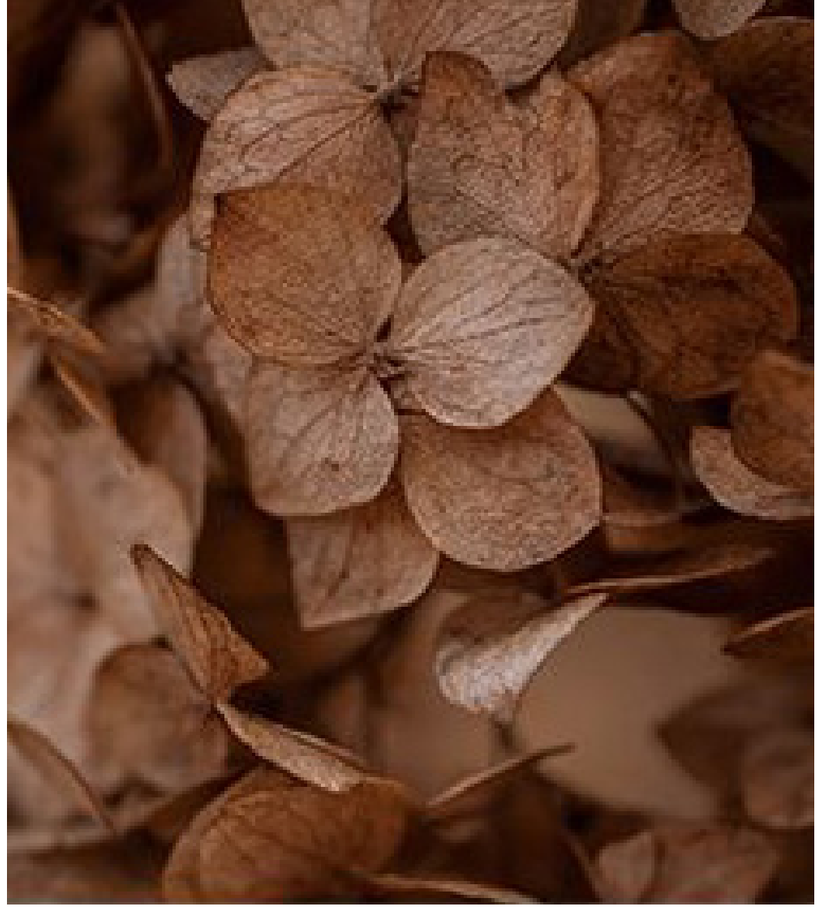

WOOD ESSENCE


FOREST

Porcelain Tile

Rectified Matt Finish

IN-EXT



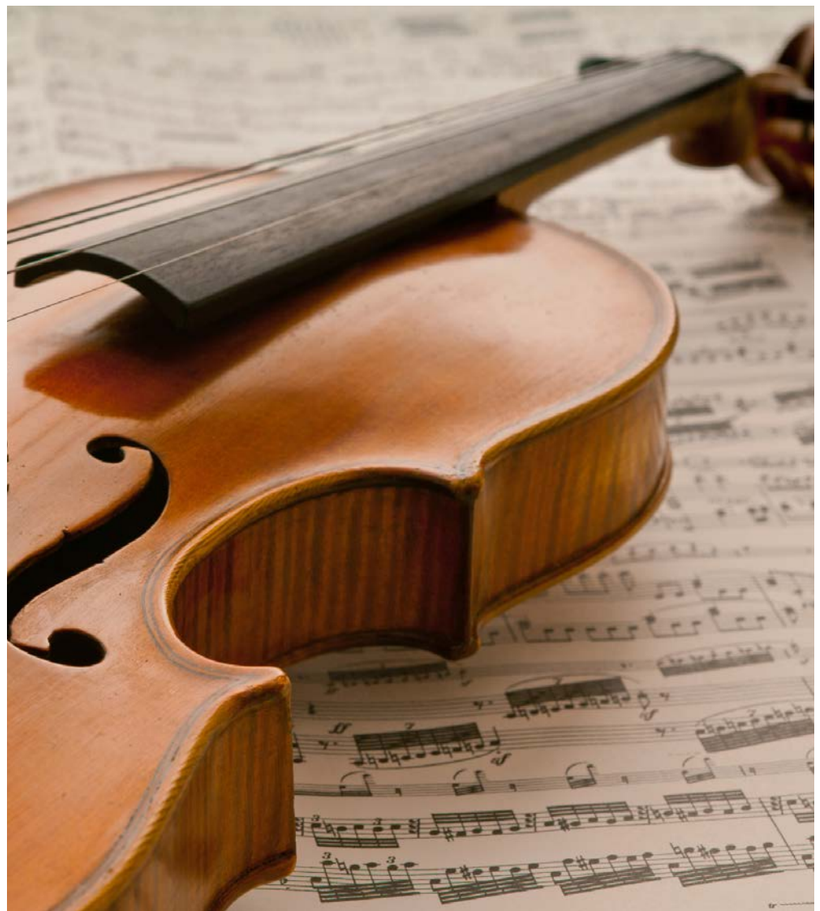

WOOD
ESSENCE **FOREST**



SILVER



WHITE



GREIGE



WALNUT

WOOD
ESSENCE **FOREST**





FOREST 20x120 cm | 7 7/8”x47 1/4”

DESARROLLO GRÁFICO - GRAPHIC DEVELOPMENT

TILE SHADE **V2**

WORK SIZE	pcs/ box	m²/ box	sqf/ box	kg/ box	box/ pallet	m²/ pallet	sqf/ pallet	kg/ pallet	FACES
195x1195x9mm	5	1,16	12,49	24,00	64	74,24	799,12	1.572,00	27





VAGLI DUNE WHITE
31,6X90
RVTO.P.B.RECT.

FOREST WALNUT
20X120
PVTO.PORC.RECT.

FOREST MOCHA
20X120
PVTO.PORC.RECT.





FOREST GREIGE 20X120 PVTO.PORC.RECT.



CALACATTA GOLD
60X120
PORC.P.B.RECT

FOREST AMBER
20X120
PVTO.PORC.RECT.



FOREST WHITE
20X120
PVTO.PORC.RECT.



CHELSEA 5TH AVE
10X20
PORC.P.B.

FOREST TAUPE
20X120
PVTO.PORC.RECT.




FOREST SILVER
20X120
PVTO.PORC.RECT.

FOREST

20x120 cm | 7 7/8”x47 1/4”

Porcelain Tile Rectified - Matt Finish IN-EXT

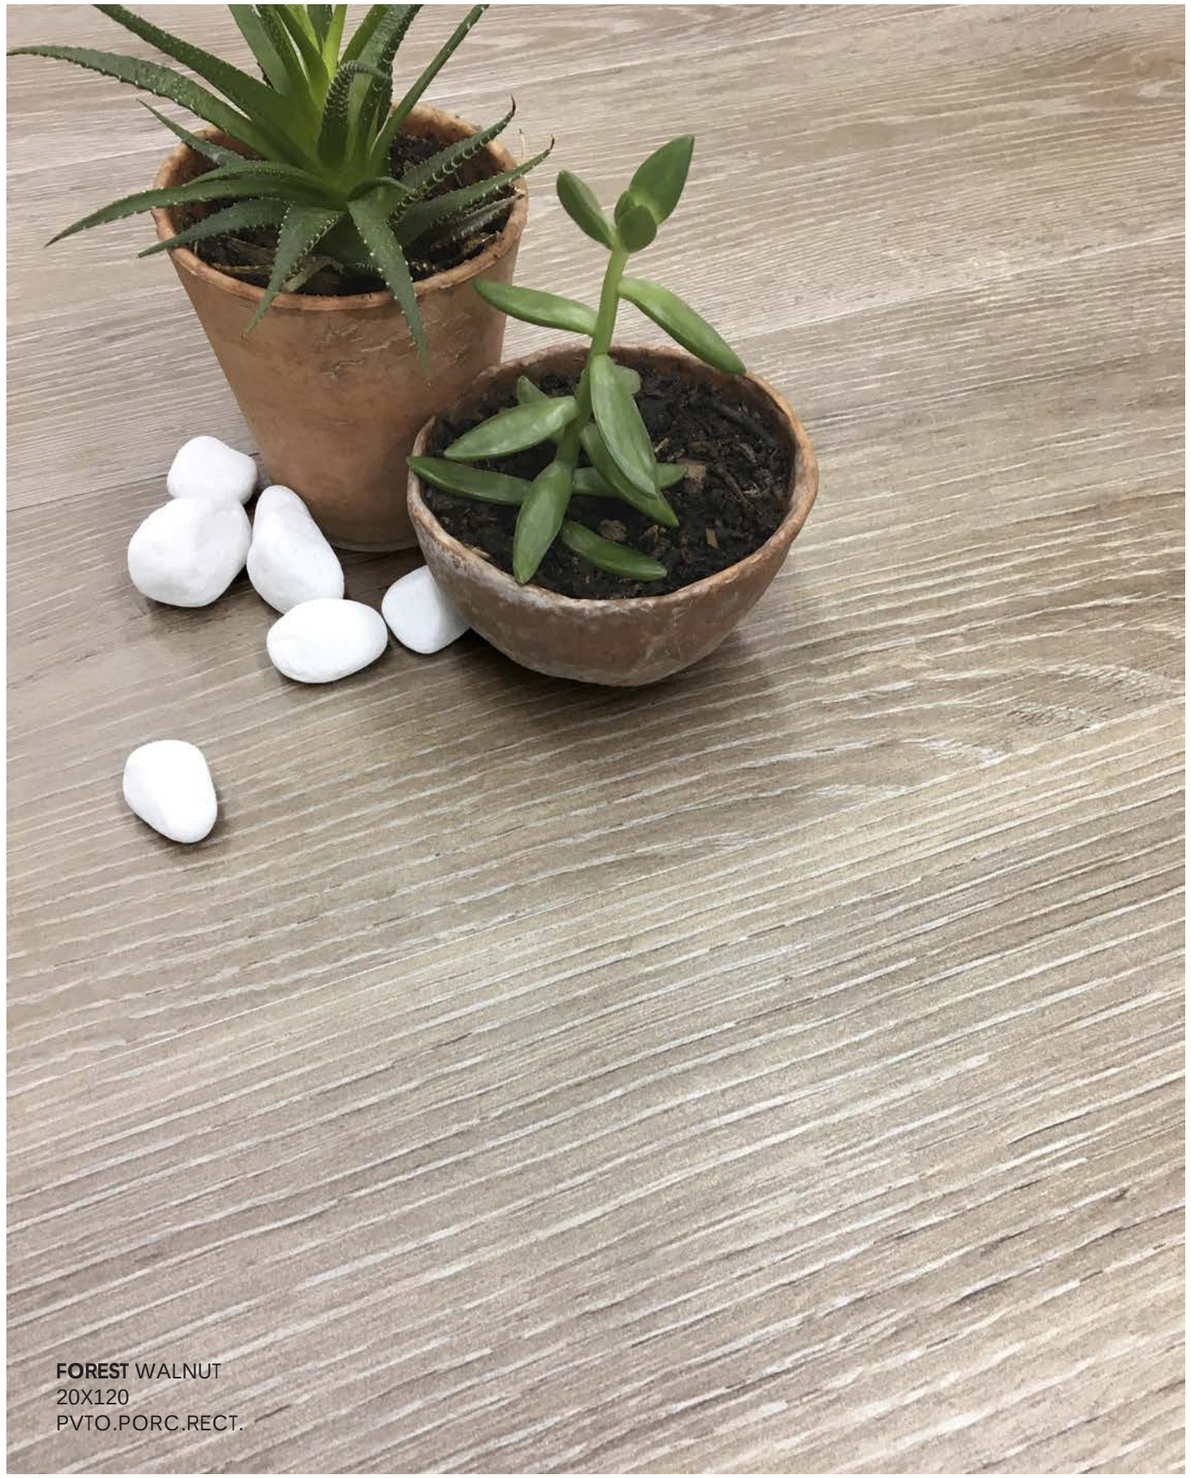

FOREST WALNUT
20X120
PVTO.PORC.RECT.

Características de producto - Product features


- Frost resistant
- Matt finish
- Rectified
- Anti-Slip **DCOF 0.59W**
- High resistant to breaking load ≥1300N
- Chemical and atmospheric resistant
- Stain resistant **5**
- Relief

Ventajas - Advantages


- Maintains characteristics over time
- Easy cleaning and maintenance
- **IN-EXT** Continuity from the indoor to outdoor
- Reused if it’s not fixed
- Perfectly calibrated and maintains thickness
- Better aesthetics than other materials

Colocación - To lay

1/3

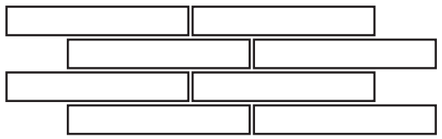

1/4

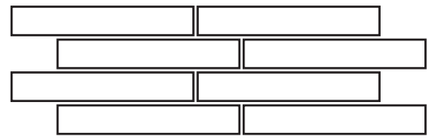

Recomendaciones - Recommendations

La superficie a revestir debe ser plana y tener rigidez, absorción, textura, cohesión, comportamiento frente al agua, estar seca y estar limpia de polvo o suciedad.
Please ensure that the surface where you are about to lay you tiles, is totally free of dust, smooth, dry, clean and structurally sound.

Compruebe que el formato, tono, color y calidad del material adquirido es el deseado y extienda en el suelo varias cajas mezcladas para lograr un efecto de composición y uniformidad. Comprobar el material antes de su colocación. No se admiten reclamaciones de material ya colocado.
Please check that de tile you are just about to install, has the shade, color and quality desired and lay some tiles on the floor, just to double check on its appearance before you start installing. The material must be checked prior to its installation. No claims would be accepted on any material already fixed.

Los adhesivos recomendados son del tipo C1 o C2 (UNE-EN 12004). Aplicar con una llana dentada uniformemente.
We recommends type C1 or C2 adhesives, (UNE-EN 12004). Use always a notched ceramic trowel from its smooth side.

Usar junta de colocación. El rejunte se ha de repartir con rápidos movimientos circular en distintos sentidos. Usar llana de goma para introducir la pasta y después, limpiar con una esponja húmeda.
Always leave a gap between tiles. Start grouting in a corner and work out. Use the rubber grout float to spread the grout directly on the tile, pressing firmly into the joints. Now begin washing the surface of the tile with a damp sponge.



Nice Ker

Ctra.Onda-Villarreal km. 2
12200 Onda (Castellón) Spain
Tel. +34 964 104 140

NICE KER reserves the right to modify and/or discontinue certain models listed in this catalog without notice. Due to the printing process colors shown in this catalog should be considered approximate; they may vary slightly from the original. The total or partial reproduction of this catalog (photographs, text, illustrations, designs, graphic representations, etc.) without the express authorization of NICE KER is forbidden.